



**FEATURES:**

- Blow-out Proof Stem
- Reduced Port
- Pressure Balance Hole In Ball Slot
- Various Thread Standards Available
- Lock Device

**STANDARDS:**

- Design: ASME B16.34
- Wall Thickness: ASME B16.34
- Pipe Thread: ASME B1.20.1,BS21
- DIN 2999/259,ISO 228/1
- JIS B 0203,ISO 7/1
- Inspection & Testing: MSS SP-110,EN 12266

No.	PARTS NAME	MATERIAL		
		CF8M	CF8	WCB
1	Body	CF8M	CF8	WCB
2	Stem	SUS316	SUS304	
3	Spring Washer		SUS304	
4	Thrust Washer		PTFE	
5	Packing Gland		PTFE	
6	Washer		PTFE	
7	Ball	CF8M	CF8	
8	Seat		PTFE	
9	End Plug	CF8M	CF8	WCB
10	Handle Cover		Plastic	
11	Locking Device		SUS301	
12	Handle		Plastic	
13	Nut		SUS301	

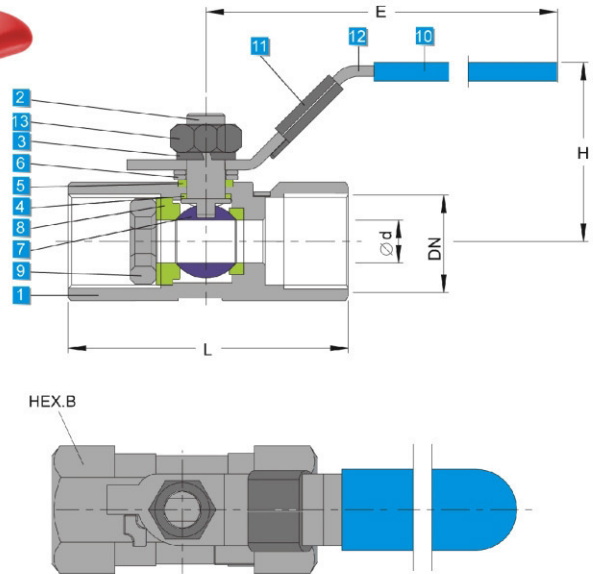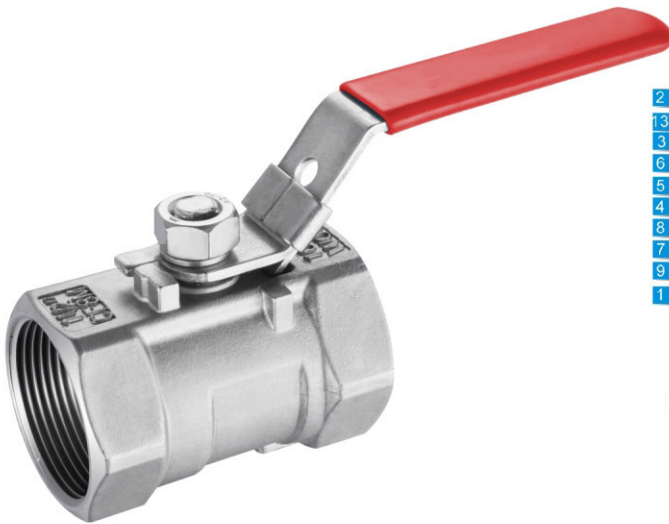

Unit:mm

DN	Ød	L	H	E	HEX.B	End Thread
1/4"	5	39	31	70	17	NPT, MPT, BSPT, BSP, DIN, PT, etc.
3/8"	7	44	36	80	21	
1/2"	9	59	42	95	25	
3/4"	12.5	60	45	95	32	
1"	15	72	54	110	38	
1-1/4"	20	77	59	110	48	
1-1/2"	25	84	63.5	150	53	
2"	32	100	70	150	66	
2-1/2"	38	120	95	200	82	
3"	48	142	103	200	96	