


FEATURES:

Blow-out Proof Stem
 Pressure Balance Hole in Ball Slot
 Various Thread Standards Available
 Lock device

STANDARDS:

Design: ASME B16.34
 Wall Thickness: ASME B16.34
 Pipe Thread: ASME B1.20.1, BS21
 DIN 2999/259, ISO 228/1, JIS B 0203, ISO 7/1
 Inspection & Testing: MSS SP-110, EN 12266

No.	PARTS NAME	MATERIAL		
1	Body	CF8M	CF8	WCB
2	Ball	CF8M	CF8	
3	Seat		PTFE	
4	Stem	SUS316		SUS304
5	Cap	CF8M	CF8	WCB
6	Cap Seal		PTFE	
7	Thrust Washer		PTFE	
8	Stem packing		PTFE	
9	Gland Nut		SUS301	
10	Handle		SUS301	
11	Spring Washer		SUS301	
12	Stem Nut		SUS304	
13	Locking Device		SUS301	
14	Handle Cover		Plastic	

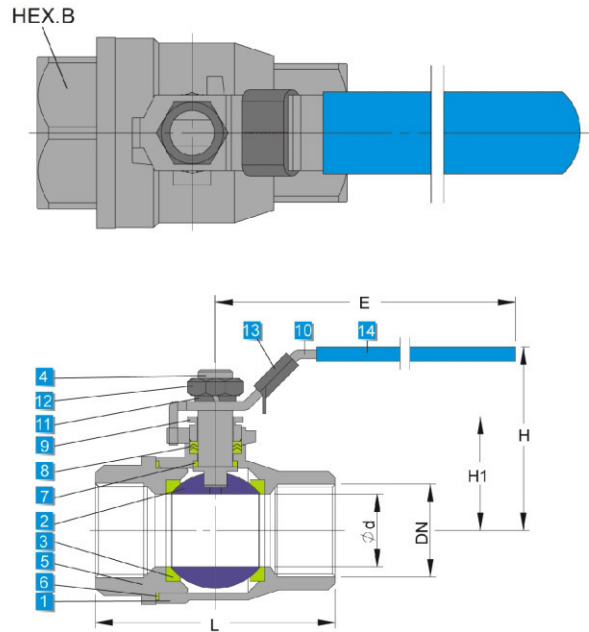

Unit:mm

DN	Ød	L	H1	H	E	Thread
1/2"	15	57	25.5	58.5	98	NPT, MPT, BSPT, BSP, DIN, PT, etc.
3/4"	20	65	28.5	62.5	120	
1"	25	77	34	68	130	
1 1/4"	32	90	42	82	150	
1 1/2"	38	97	47	92	170	
2"	49	115	55.5	100	170	